



Health Comfort Profession

The Specialist Of PU
Polyurethane Products



立欣工業股份有限公司

Lead Since Industry Co.,Ltd.

TEL : 886-4-7810889

FAX : 886-4-7810662

web site : www.leadsince.com.tw

e-mail : lead-since@umail.hinet.net

leading.since@msa.hinet.net

彰化縣鹿港鎮彰濱工業區工業東三路15號

No.15, Industrial E-3 Rd, Changbin Industrial Park,

Lugang Township, Changhua County, 50544, Taiwan





Introduction / Philosophy

Harmony · Honesty · Outstanding · Innovation

LIH SIN was established in the 1982, a professional PU polyurethane foam manufacturer, design-orientated operates with innovative PU forming technology. Decades of experience leading our company to continuously improving our products.

LIH SIN is an ISO 9001 qualified company a well established quality control system running in-house from fault prevention to problem solving, immediate correction and continuous improvement for sustainability. Our goal is to achieve and maintain the highest standard of products and services ensuring ultimate customer satisfactions.

We continuously integrate quality, service, health, safety and environmental protection in management and continuous improvement to make greener products, which we believe would lead to less pollution to the environment. The company is equipped with the sewage and air process facilities with qualified certificates to keep our environment clean and pollution free.

LIH SIN provides all the support that our customers need, we continuously customizing our extensive range of Polyurethane systems from Gel, Elastomers, Memory Foams, Flexible Foams, Integral Skin Foams, Rigid Foams, etc.. to provide customized product design solutions for innovative ideas in view and need of our customers.

Harmony

Endeavored in sustainable development to create prosperous and harmonic business and working environments for our employees, customers, suppliers.

Honesty

Trustworthy working attitude, open communication, always seeks truth from facts to gain trust and credibility.

Outstanding

Assure exclusive quality management regularly upgraded and executed to training program. From production to QC departments well acknowledge and implement quality assurance.

Innovation

Continuous R&D discovers new opportunity and technology to capture latest market trend. Carrying environmental and social responsibility, carefully chosen material and process work to comply Green Policy to protect and treasure our earth.

Core Competences

- ★ Professional and innovative forming technology.
- ★ Efficient and penetrative R&D capability.
- ★ Advanced and environmental friendly PU material developments.
- ★ Professional manufacturing capability.
- ★ Quality products and services.

立欣工業股份有限公司
Lead Since Industry Co., Ltd.



Lightweight and strong micro-cellular Polyurethane solid tire, state of art PU forming technology with advanced PU systems. Our tires are designed for low-speed performance vehicle, uniformly distributed bubble-free tire structure attaining a smooth vehicle ride, longer life of tires, outstanding wear resistance. Drivers can spell the difference with positive driving experience of our balanced tires.

Self-cleaning effect PU tire sticks less soil than rubber, easy to clean and maintain does not contaminate in-door carpet and floor. Solid tire structure requires no air filling and will not puncture, no more flats, maintenance free. Best solution to Green environment.



Comparison Table of Tire Character / 輪胎特性一覽表

特性	Character	雙密度 PU 實心胎 Dual-density PU solid tire	單密度 PU 實心胎 Single-density PU solid tire	PU 填充胎 PU foam filled tire
免維修保養	Maintenance free	😊	😊	😊
不破胎	Puncture free	😊	😊	😊
耐磨性	Wear resistance (tread wear)	😊	😊	😊
產品壽命	Product lifetime	😊	😊	😐
續航率	Increased driving range	😊	😊	😐
舒適性	Ride comfort	😊	😐	😐
吸震性	Impact absorption	😊	😐	😐
跳動平衡	Radial balance (up and down)	😊	😊	😞
偏擺平衡	Lateral balance (side-to-side)	😊	😊	😞
動態走行強度	Dynamic rolling strength	😊	😊	😐
輪胎負載	Loading capacity	😊	😊	😐
回復性	Recovery to compression	😊	😐	😐
抓地性	Ground traction	😊	😐	😊
環保材質	Environmental-friendly material	😊	😊	😐
交期	Lead-time	😊	😊	😞
品質穩定度	Stability of product quality	😊	😊	😞

😊 Good 😐 Acceptable 😞 Poor

PU SOLID TIRE

6"



LS-W243
(6×1-1/4")

6"



LS-W246
(6×2")

6"



LS-W280
(6×1-3/4")

6"




LS-W307
(6×2")

7"



LS-W250
(7×1-3/4")

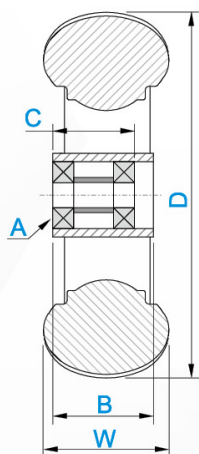

Item No.				LS-W243	LS-W280	LS-W246	LS-W307	LS-W250
Specification				6×1-1/4"	6×1-3/4"	6×2"		7×1-3/4"
Diameter(D)				Ø150	Ø154	Ø152	Ø152	Ø175
Tire Section Width(W)				W:30	W:40	W:47	6×2"	W:42
Rim Model	A	B	C	Measurement:mm				
LS-W243-01	608z	40.0	40.0	★				
LS-W240-06	6002-2RS	57.4	57.4		★			
LS-W240-04	6002-2RS	54.1	38.1		★			
LS-W240-09	6900z	54.0	33.2		★			
LS-W240-10	608z	57.0	57.0		★			
LS-W240-11	6002-2RS	47.8	38.1		★			
LS-W240-13	6201z	48.1	40.0		★			
LS-W240-15	6201z	48.1	39.0		★			
LS-W240-18	6002z	54.1	37.6		★			
LS-W240-20	6200-2RS	58.6	58.6		★			
LS-W240-22	608z	47.8	38.0		★			
LS-W240-24	6000z	58.5	58.5		★			
LS-W246-01	608z	60.8	60.8			★		
LS-W246-02	6901z	60.8	60.8			★		
LS-W246-03	6900z	51.8	28.1			★		
LS-W250-02	6901ZZ	58.0	58.0					★
LS-W250-04	6000z	59.0	59.0					★
LS-W250-05	608ZZ	40.0	40.0					★
LS-W250-06	608z	59.0	59.0					★
LS-W240-01	Ø17.0×5.0×40.1	54.7	40.1		★			
LS-W240-02	Ø15.0×5.0×29.2	54.6	29.2		★			
LS-W240-05	Ø17.0×5.0×38.0	54.7	38.0		★			
LS-W240-07	Ø17.0×6.0×43.5	54.7	43.5		★			
LS-W240-12	Ø17.0×5.0×38.0	48.4	38.0		★			
LS-W240-17	Ø17.0×5.0×40.5	51.6	40.5		★			
LS-W240-19	Ø15.0×5.0×38.0	48.4	38.0		★			
LS-W240-21	Ø15.0×5.0×38.0	58.0	38.0		★			
LS-W240-23	Ø17.0×6.0×41.0	58.0	41.0		★			
LS-W307-01	608zz	60.8	60.8				★	
LS-W307-02	6901zz	60.8	60.8				★	

7"



LS-W258
(7"×60)

7"



LS-W262
(7×2")

7"



LS-W281
(7×1-3/4")

8"



LS-W244
(8×1-1/4")

8"



LS-W237
(200×50)

8"



LS-W240
(200×50)

Item No.				LS-W258	LS-W262	LS-W281	LS-W244	LS-W237	LS-W240
Specification				7"×60	7×2"	7×1-3/4"	8×1-1/4"	200×50	200×50
Diameter(D)				Ø178		Ø183	Ø200	Ø194	Ø194
Tire Section Width(W)				W:60		W:46	W:30	W:49	W:49
Rim Model	A	B	C						
LS-W244-01	608z	40.0	40.0				★		
LS-W240-04	6002-2RS	54.1	38.1	★		★		★	★
LS-W240-06	6002-2RS	57.4	57.4	★		★		★	★
LS-W240-09	6900z	54.0	33.2	★		★		★	★
LS-W240-10	608z	57.0	57.0	★		★		★	★
LS-W240-11	6002-2RS	47.8	38.1	★		★		★	★
LS-W240-13	6201z	48.1	40.0	★		★		★	★
LS-W240-15	6201z	48.1	39.0	★		★		★	★
LS-W240-18	6002z	54.1	37.6	★		★		★	★
LS-W240-20	6200-2RS	58.6	58.6	★		★		★	★
LS-W240-22	608z	47.8	38.0	★		★		★	★
LS-W240-24	6000z	58.5	58.5	★		★		★	★
LS-W250-02	6901ZZ	58.0	58.0		★				
LS-W250-04	6000z	59.0	59.0		★				
LS-W250-05	608ZZ	40.0	40.0		★				
LS-W250-06	608z	59.0	59.0		★				
LS-W240-01	Ø17.0×5.0×40.1	54.7	40.1	★		★		★	★
LS-W240-02	Ø15.0×5.0×29.2	54.6	29.2	★		★		★	★
LS-W240-05	Ø17.0×5.0×38.0	54.7	38.0	★		★		★	★
LS-W240-07	Ø17.0×6.0×43.5	54.7	43.5	★		★		★	★
LS-W240-12	Ø17.0×5.0×38.0	48.4	38.0	★		★		★	★
LS-W240-17	Ø17.0×5.0×40.5	51.6	40.5	★		★		★	★
LS-W240-19	Ø15.0×5.0×38.0	48.4	38.0	★		★		★	★
LS-W240-21	Ø15.0×5.0×38.0	58.0	38.0	★		★		★	★
LS-W240-23	Ø17.0×6.0×41.0	58.0	41.0	★		★		★	★

PU SOLID TIRE

8"



LS-W241
(200×75)

8"



LS-W247
(200×50)

8"



LS-W259
(200×70)

8"



LS-W293
(200×50)

9"




LS-W249
(220×65)

9"



LS-W253
(210×65)

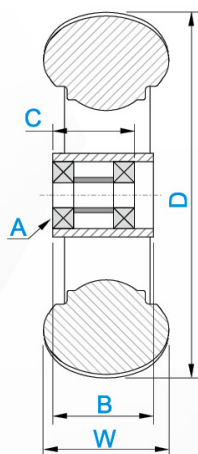

Item No.				LS-W241	LS-W247	LS-W259	LS-W293	LS-W249	LS-W253
Specification				200×75	200×50	200×70	200×50	220×65	210×65
Diameter(D)				Ø194	Ø192	Ø192		Ø220	Ø210
Tire Section Width(W)				W:73	W:49	W:70		W:64	W:64
Rim Model	A	B	C	Measurement:mm					
LS-W240-04	6002-2RS	54.1	38.1		★				
LS-W240-06	6002-2RS	57.4	57.4		★				
LS-W240-09	6900z	54.0	33.2		★				
LS-W240-10	608z	57.0	57.0		★				
LS-W240-11	6002-2RS	47.8	38.1		★				
LS-W240-13	6201z	48.1	40.0		★				
LS-W240-15	6201z	48.1	39.0		★				
LS-W240-18	6002z	54.1	37.6		★				
LS-W240-20	6200-2RS	58.6	58.6		★				
LS-W240-22	608z	47.8	38.0		★				
LS-W240-24	6000z	58.5	58.5		★				
LS-W241-03	6900z	68.5	33.8	★		★			
LS-W241-04	608z	61.8	61.8	★		★			
LS-W241-09	6201ZZ	61.8	61.8	★		★			
LS-W241-11	6200ZZ	61.9	61.9	★		★			
LS-W241-11	6200ZZ	61.9	61.9	★		★			
LS-W249-01	6201z	70.2	70.2				★		★
LS-W249-08	6201z	69.4	38.0				★		★
LS-W249-11	6903z	62.0	58.0				★		★
LS-W240-01	Ø17.0×5.0×40.1	54.7	40.1		★				
LS-W240-02	Ø15.0×5.0×29.2	54.6	29.2		★				
LS-W240-05	Ø17.0×5.0×38.0	54.7	38.0		★				
LS-W240-07	Ø17.0×6.0×43.5	54.7	43.5		★				
LS-W240-12	Ø17.0×5.0×38.0	48.4	38.0		★				
LS-W240-17	Ø17.0×5.0×40.5	51.6	40.5		★				
LS-W240-19	Ø15.0×5.0×38.0	48.4	38.0		★				
LS-W240-21	Ø15.0×5.0×38.0	58.0	38.0		★				
LS-W240-23	Ø17.0×6.0×41.0	58.0	41.0		★				
LS-W241-01	Ø17.0×6.0×41.0	69.0	41.0	★		★			
LS-W241-02	Ø15.0×5.0×29.2	68.9	29.2	★		★			
LS-W241-05	Ø17.0×5.0×38.0	68.9	38.0	★		★			
LS-W241-08	Ø15.0×5.0×38.0	60.1	38.0	★		★			
LS-W241-10	Ø17.0×5.0×38.0	69.0	38.0	★		★			
LS-W241-12	Ø15.0×5.0×29.2	60.1	29.2	★		★			
LS-W249-04	Ø17.0×5.0×38.0	70.1	38.0				★		★
LS-W249-07	Ø17.0×5.0×38.5	70.1	38.5				★		★
LS-W249-10	Ø17.0×6.0×35.0	61.0	35.0				★		★
LS-W249-12	Ø19.05×4.75×50.8	62.0	50.8				★		★
LS-W249-13	Ø17.0×6.0×38.8	61.0	38.8				★		★

9"



LS-W271
(228×70)

10"



LS-W222
(260×85)

10"



LS-W260
(260×85)

10"



LS-W263
(260×85)

12"



LS-W270
(285×91)

Item No.				LS-W271	LS-W222	LS-W260	LS-W263	LS-W270
Specification				228×70	260×85	260×85	260×85	285×91
Diameter(D)				Ø225	Ø262	Ø257	Ø257	Ø285
Tire Section Width(W)				W:68	W:85	W:83	W:83	W:91
Rim Model	A	B	C	Measurement:mm				
LS-W222-01					★			
LS-W260-FR02	6202z		58.0			★	★	★
LS-W260-FR03	6202z		46.0			★	★	★
LS-W260-FR04	6202z		34.2			★	★	★
LS-W260-FR06	6202z		30.0			★	★	★
LS-W260-FR08	6003ZZ		50.8			★	★	★
LS-W260-FR09	6202z		38.0			★	★	★
LS-W260-FR10	6202-2RS		39.0			★	★	★
LS-W260-FR11	6202ZZ		33.7			★	★	★
LS-W271-FR01	6201z		38.0	★				
LS-W222-02					★			
LS-W260-RR01	Ø17.0×6.0×38.8		38.8			★	★	★
LS-W260-RR02	Ø20.0×5.0×58.0		58.0			★	★	★
LS-W260-RR03	Ø19.0×4.8×44.5		44.5			★	★	★
LS-W260-RR04	Ø17.0×6.0×35.0		35.0			★	★	★
LS-W260-RR06	Ø17×6×32.1		32.1			★	★	★
LS-W260-RR07	Ø19×4.8×50		50.0			★	★	★
LS-W260-RR08	Ø19.05×4.75×50.8		50.8			★	★	★
LS-W260-RR09	Ø19×5×38.0		38.0			★	★	★
LS-W260-RR10	Ø19.0×4.8×56.0		56.0			★	★	★
LS-W260-RR11	Ø17.0×6.0×25.0		25.0			★	★	★
LS-W260-RR12	Ø17.0×4.8×50.5		50.5			★	★	★
LS-W271-RR01	Ø17.0×5.0×38.5		38.5	★				
LS-W271-RR02	Ø17.0×6.0×35.0		35.0	★				
LS-W271-RR03	Ø17×6×38.8		38.8	★				
LS-W271-RR04	Ø15.0×5.0×29.0		29.0	★				
LS-W271-RR05	Ø19.05×4.75×50.8		50.8	★				
LS-W277-RR01	Ø17×6×38.8		38.8	★				

PU SOLID TIRE

12.5"



LS-W264
(320×100)

20"



LS-W257
(20×1-3/8")



22"




LS-W242
(22×1-3/8")



24"



LS-W232
(24×1")



24"



LS-W233
(24×1-3/8")



24"



LS-W272
(24X1")



Item No.				LS-W264	LS-W257	LS-W242	LS-W232	LS-W233	LS-W272
Specification				320×100	20×1-3/8"	22×1-3/8"	24×1"	24×1-3/8"	24X1"
Diameter(D)				Ø320	Ø466	Ø515	Ø588	Ø555	Ø588
Tire Section Width(W)				W:100	W:29	W:30	W:20	W:29	W:20
Rim Model	A	B	C	Measurement:mm					
LS-W264-FR01	6003z		50.8	★					
LS-W264-FR02	6202z		38.1	★					
LS-W264-FR03	6202ZZ		42.5	★					
LS-W264-RR01	Ø19.05×4.75×50.8		50.8	★					
LS-W264-RR02	Ø17×5×39.0		38.0	★					
LS-W264-RR03	Ø19×5×39.0		39.0	★					
LS-W264-RR04	Ø19×4.8×59.3		59.3	★					

PU FOAM INFILLED TIRE

feature Rubber tire foam filled with lightweight PU, sufficient tire traction, smooth air tire like riding, and uniformly molded structure lead to better tire balance than static forming process. Maintenance free, no air filling, no puncture, no more flats.



Specification	SIZE
7x1-3/4	7
200x50	8
8x2.50	8
2.50-4	9
9x3.50-4	9
2.80/2.50-4	9
3.00-4(260x85)	10

Specification	SIZE
4.00-5(330x100)	13
3.50-5	
4.10/3.50-5	11.5
4.10/3.50-6	11.5
12-1/2x2-1/4	12.5
14x2.125	14
3.00-8	14



PU Elastomer Wheel

Elastomer wheel is ideal for durable components in high-wear resistance, good traction and rebound.



Item No.	LS-W215	LS-W216	LS-W216A	LS-W217	LS-W218	LS-W219
Specification	3x1"	4x1"	4x1.25"	5x1"	6x1"	6x1.5"
Diameter(D)	Ø76	Ø100	Ø100	Ø127	Ø152	Ø152
Tire Section Width(W)	W:24	W:24	W:30	W:27	W:27	W:36
Specification	Shaft length	Bearing distance	Measurement:mm			
608zz	24	24	★	★	★	
608zz	27	27		★		
6000	27	27			★	
6000	35.0	35.0				★

PU Arm Pad

Q'TY:50
N.W.:14
G.W.:15
CUFT:1.3



LS-AP01 Metal base
Size : 375 x 53 x 30mm
(Hole Distance 200mm)

Q'TY:50
N.W.:14
G.W.:15
CUFT:1.1



LS-AP02 Metal base
Size : 370 x 53 x 50mm
(Hole Distance 297mm)

Q'TY:50
N.W.:12
G.W.:13
CUFT:1.3



LS-AP03 Metal base
Size : 320 x 49 x 28mm
(Hole Distance 171mm)

Q'TY:50
N.W.:12
G.W.:13
CUFT:1.3



LS-AP04 Metal base
Size : 320 x 49 x 28mm
(Hole Distance 171mm)

Q'TY:50
N.W.:14.5
G.W.:15.5
CUFT:1



LS-AP05 Metal base
Size : 301 x 53 x 30mm
(Hole Distance 202.5mm)

Q'TY:50
N.W.:15.6
G.W.:16.6
CUFT:1.1



LS-AP06 Metal base
Size : 325 x 56 x 30mm
(Hole Distance 227mm)

Q'TY:60
N.W.:11.4
G.W.:12.4
CUFT:1.1



LS-AP07 Metal base
Size : 250 x 56 x 30mm
(Hole Distance 84mm)

Q'TY:65
N.W.:11.3
G.W.:12.3
CUFT:3.3



LS-AP10
Size : 290 x 70 x 56mm
(Fit 1" Square Tube)

Q'TY:50
N.W.:11.4
G.W.:12.4
CUFT:3.3



LS-AP11
Size : 375 x 70 x 56mm
(Fit 1" Square Tube)


PU Molded Memory Pillow

- ♦ **Exceptional Comfort** : Reinforcement on head and neck.
- ♦ **Firm Support** : Stable support to spinal alignment and reduces back pain.
- ♦ **Hypoallergenic** : Resistant to dust mites and allergens.
- ♦ **Durability** : Retains pillow shape and support over time.



LS-PP01

610x330x100mm

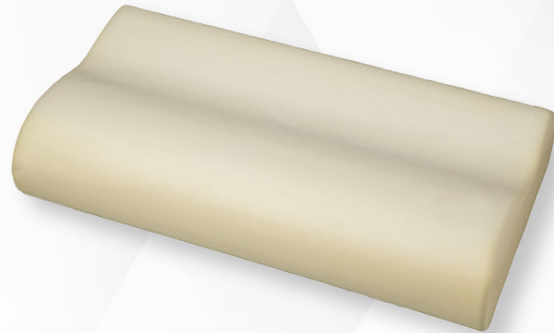

LS-PP02

620x350x120mm



LS-PP03

600x370x110mm



GEL

Jelly-like material provides intact support and the least body pressure generated, shock absorption, inactive to temperature changes.



LS-228

Exercise Saddle
330x310x55mm
EM top w/ slab foam, Metal base;
Coil spring w/ clamp
Option: Vinyl w/Gel
8PCS/ 3.06CUFT/ 13.5KGS/ 14.5KGS



LS-A2

Exercise Saddle
260x260x45mm
Vinyl top w/ slab foam, Metal base
W/ 3 bolt nuts or steel rail & clamp
36PCS/ 4CUFT/ 26.5KGS/ 27.5KGS



LS-A7

Exercise Saddle
330x324x45mm
Vinyl top w/ slab foam, Metal base
W/ 3 bolt nuts or steel rail & clamp
20PCS/ 4CUFT/ 22KGS/ 23KGS



LS-A12

Exercise Saddle
330x320x55mm
EM top w/ HR foam, Metal base
W/ 3 bolt nuts or steel bracket
Option: EM, EMG
15PCS/ 3.6CUFT/ 17.5KGS/ 18.5KGS



LS-A16

Exercise Saddle
270x256x60mm
EM top w/ HR foam, Metal base
W/ 3 bolt nuts or steel rail & clamp
Option: EM, EMG
30PCS/ 3.6CUFT/ 21KGS/ 22KGS



LS-A18

Exercise Saddle
292x285x55mm
EM top w/ HR foam, Metal base
W/ 3 bolt nuts or steel bracket
Option: EM
16PCS/ 3CUFT/ 15KGS/ 16KGS



LS-A20

Exercise Saddle
270x260x78mm
EM top w/ HR foam, Metal base
W/ 3 bolt nuts or steel rail & clamp
Option: EM
24PCS/ 3.6CUFT/ 19KGS/ 20KGS



LS-A22

Exercise Saddle
320x305x60mm
EM top w/ HR foam, Metal base
W/ 3 bolt nuts or steel rail & clamp
Option: EM
17PCS/ 3.5CUFT/ 20.4KGS/ 21.4KGS



LS-A26

Exercise Saddle
320x305x80mm
EM top w/ HR foam, Metal base
W/ 3 bolt nuts or steel rail & clamp
Option: EM
12PCS/ 2.8CUFT/ 15.3KGS/ 16.3KGS



LS-A28

Exercise Saddle
318x315x66mm
EM top w/ HR foam, Metal base
W/ 3 bolt nuts or steel rail & clamp
12PCS/ 4.1CUFT/ 24KGS/ 25KGS



LS-A29

Exercise Saddle
350x225x55mm
EM top w/ HR foam, Metal base
W/ 3 bolt nuts
8PCS/ 2.8CUFT/ 6KGS/ 7KGS



LS-B1

Exercise Saddle
273x273x57mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts or steel rail & clamp
30PCS/ 3.5CUFT/ 20KGS/ 21KGS



◀ LS-B11

Exercise Saddle
292x260x47mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts or steel rail & clamp
33PCS/ 3.84CUFT/ 22KGS/ 23KGS



◀ LS-B16

Exercise Saddle
273x273mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts
30PCS/ 3.5CUFT/ 19KGS/ 20KGS



◀ LS-B22

Exercise Saddle
280x267x68mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts or steel rail & clamp
21PCS/ 3.5CUFT/ 18KGS/ 19KGS



◀ LS-B25

Exercise Saddle
330x324mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts or Springs w/steel bracket
20PCS/ 3.84CUFT/ 23.2KGS/ 24.2KGS



◀ LS-B26

Exercise Saddle
292x273mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts
24PCS/ LS-B27 3.4CUFT/ 15KGS/ 16KGS



◀ LS-B27

Exercise Saddle
270x270x55mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts or steel rail & clamp
30PCS/ 3.4CUFT/ 18KGS/ 19KGS



◀ **LS-B28**

Exercise Saddle
278x260mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts or steel rail & clamp
21PCS/ 3.5CUFT/ 17KGS/ 18KGS



◀ **LS-B29**

Exercise Saddle
268x275mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts or steel rail & clamp
30PCS/ 3.5CUFT/ 19.5KGS/ 20.5KGS



◀ **LS-B31**

Exercise Saddle
335x325x60mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts
16PCS/ 3.84CUFT/ 18KGS/ 19KGS



◀ **LS-B32**

Exercise Saddle
265x270x60mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts or steel rail & clamp
27PCS/ 3.5CUFT/ 18.4KGS/ 19.4KGS



◀ **LS-B35**

Exercise Saddle
232x294x55mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts or steel rail & clamp
25PCS/ 3.5CUFT/ 25KGS/ 26KGS



◀ **LS-B36**

Exercise Saddle
285x288x69mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts or steel rail & clamp
24PCS/ 3.63CUFT/ 19KGS/ 20KGS



LS-B38-1

Exercise Saddle
242x300x67mm
PU self-skinning foam, Metal base
W/ 3 bolt & nuts or steel rail & clamp
20PCS/ 3.5CUFT/ 18.4KGS/ 19.4KGS



LS-B40

Exercise Saddle
257x320x55mm
PU self-skinning foam, Plywood base
W/ 3 bolt & nuts
20PCS/3.2CUFT/18.4KGS/19.4KGS



LS-B41

Exercise Saddle
300x320x60mm
PU self-skinning foam, Plywood base
W/ 3 bolt & nuts
15PCS/ 3.8CUFT/ 19.5KGS/ 20.5KGS



LS-V01

Exercise Saddle
250x260x58mm
PU vacuum foaming, EM top, Metal base
W/ 3 bolt & nuts or steel rail & clamp
Option: EM, EMG
24PCS/ 3.5CUFT/ 18KGS/ 19KGS



LS-V03

Exercise Saddle
282x282x50mm
PU vacuum foaming, EM top, Metal base
W/ 3 bolt & nuts or steel rail & clamp
Option: EM, EMG
27PCS/ 3.63CUFT/ 23KGS/ 24KGS



LS-V04

Exercise Saddle
280x285x55mm
PU vacuum foaming, EM top, Metal base
W/ 3 bolt & nuts or steel rail & clamp
27PCS/ 3.63CUFT/ 22KGS/ 23KGS



● **LS-V06**

Exercise Saddle
230x295x65mm
PU vacuum foaming, EM top, Metal base
W/ 3 bolt & nuts or steel rail & clamp
20PCS/ 3.5CUFT/ 23KGS/ 24KGS



● **LS-V08**

Exercise Saddle
274x260x58mm
PU vacuum foaming, EM top, Metal base
W/ 3 bolt & nuts or steel rail & clamp
Option: EM, EMG
24PCS/ 3.5CUFT/ 18KGS/ 19KGS



● **LS-V09**

Exercise Saddle
283x282x66mm
PU vacuum foaming, EM top, Metal base
W/ 3 bolt & nuts or steel rail & clamp
24PCS/ 3.63CUFT/ 19KGS/ 20KGS



● **LS-V10**

Exercise Saddle
330x320x68mm
PU vacuum foaming, EM top, Metal base
W/ 3 bolt & nuts or steel bracket
16PCS/ 3.84CUFT/ 18KGS/ 19KGS



◀ **LS-820**

Unicycle saddle
324x127x55mm
PU self-skinning foam W/ Metal base.
Seat post OD:22.2mm, Tube
length:180mm (7")
16PCS/2.67CUFT/ 14.5KGS/ 15.5KGS



◀ **LS-821**

Unicycle saddle
273x127x50mm
PU self-skinning foam W/ Metal base.
Seat post OD:22.2mm, Tube
length:180mm (7")
24PCS/ 3.5CUFT/ 16.8KGS/ 17.8KGS



◀ LS-E2

Rowing seat
368x368
PU self-skinning foam, Plywood base,
4pcs T-nuts
20PCS/4.5CUFT/ 16KGS/ 17KGS



◀ LS-E18

Rowing seat
267X368X65mm
PU self-skinning foam, Plywood base,
4pcs T-nuts
16PCS/ 3.4CUFT/ 15KGS/ 16KGS



◀ LS-E22

Rowing seat
260x320x52mm
PU self-skinning foam, Plywood base,
4pcs T-nuts
15PCS/ 3.65CUFT/ 11.5KGS/ 12.5KGS



◀ LS-E28

Rowing seat
262x322x62mm
PU self-skinning foam, Plywood base,
4pcs T-nuts
12PCS/ 2.3CUFT/ 12KGS/ 13KGS



◀ LS-E29

Rowing seat
270x380x46mm
PU self-skinning foam, Plywood base,
4pcs T-nuts
12PCS/ 3.5CUFT/ 13KGS/ 14KGS



◀ LS-E31

Rowing seat
300x200x40mm
PU self-skinning foam, Plywood base,
4pcs T-nuts
12PCS/ 3.0CUFT/ 12KGS/ 13KGS



LS-AE001

Recumbent Seat & Back

Seat: 305x475x70mm

Back: 485x370x104mm

PU Molded foam W/ plywood, 8pcs T-nuts

Seat: 10PCS/ 3.7CUFT/ 15KGS/ 16KGS

Back: 10PCS/ 6.2CUFT/ 23KGS/ 24KGS



LS-AE003

Recumbent Seat & Back

Seat: 260x450x73mm

Back: 460x425x104mm

PU Molded foam W/ plywood, 8pcs T-nuts

Seat: 10PCS/ 3.5CUFT/ 10KGS/ 11KGS

Rest: 10PCS/ 6.3CUFT/ 20KGS/ 21KGS



LS-AE005

Recumbent Seat & Back

Seat: 365x410x80mm

Back: 320x185x68mm

PU Molded foam W/ plywood, 8pcs T-nuts

Seat: 10PCS/ 4.8CUFT/ 17.5KGS/ 18.5KGS

Rest: 10PCS/ 1.6CUFT/ 6.8KGS/ 7.8KGS



LS-AE013

Recumbent Seat & Back

Seat: 260x450x73mm

Back: 485x405x75mm

PU Molded foam W/ plywood, 8pcs T-nuts

Seat: 10PCS/ 3.5CUFT/ 10KGS/ 11KGS

Rest: 10PCS/ 5.3CUFT/ 24KGS/ 25.5KGS



LS-AF001

Recumbent Seat & Back

Seat: 290x400x72mm

Back: 427x355x77mm

PU Molded foam W/ plywood, 8pcs T-nuts

Seat: 10PCS/ 2.8CUFT/ 11KGS/ 12KGS

Rest: 8PCS/ 3.8CUFT/ 12.5KGS/ 13.5KGS



LS-AF002

Recumbent Seat & Back

Seat: 310x420x60mm

Back: 495x405x65mm

PU Molded foam W/ plywood, 8pcs T-nuts

Seat: 10PCS/ 3.4CUFT/ 12.5KGS/ 13.5KGS

Back: 10PCS/ 4.6CUFT/ 19KGS/ 20KGS



◀ LS-612

Recumbent Seat & Back

Seat: 264x362x53mm

Back: 356x305x53mm

PU self-skinning foam W/ plywood, 8pcs T-nuts

Seat: 20PCS/ 4.4CUFT/ 16KGS/ 17KGS

Back: 15PCS/ 3.5CUFT/ 14KGS/ 15KGS



◀ LS-616

Recumbent Seat & Back

Seat: 230x407x60mm

Back: 370x320x60mm

PU self-skinning foam W/ plywood, 8pcs T-nuts

Seat: 15PCS/ 3.5CUFT/ 22KGS/ 23KGS

Rest: 15PCS/ 3.5CUFT/ 22KGS/ 23KGS



◀ LS-618

Recumbent Seat & Back

Seat: 260x420x57mm

Back: 327x305x51mm

PU self-skinning foam W/ plywood, 8pcs T-nuts

Seat: 12PCS/ 3.5CUFT/ 11KGS/ 12KGS

Rest: 16PCS/ 3.5CUFT/ 16KGS/ 17KGS



◀ LS-620

Recumbent Seat & Back

Seat: 260x420x57mm

Back: 352x324x73mm

PU self-skinning foam W/ plywood, 8pcs T-nuts

Seat: 15PCS/ 3.2CUFT/ 15.5KGS/ 16.5KGS

Rest: 10PCS/ 2.5CUFT/ 15KGS/ 16KGS



◀ LS-622

Recumbent Seat & Back

Seat: 394x320x58mm

Back: 416x356x60mm

PU self-skinning foam W/ plywood, 8pcs T-nuts

Seat: 10PCS/ 2.7CUFT/ 13KGS/ 14KGS

Rest: 10PCS/ 3.5CUFT/ 18.5KGS/ 19.5KGS



◀ **LS-623**

Recumbent Seat & Back
 Seat: 310x423x70mm
 Back: 456x407x69mm
 PU self-skinning foam W/ plywood, 8pcs T-nuts
 Seat: 10PCS/ 4.3CUFT/ 14KGS/ 15KGS
 Back: 8PCS/ 5.26CUFT/ 18KGS/ 19KGS



◀ **LS-712**

Recumbent Seat & Back
 Seat: 325x425x75mm
 Back: 457x406x60mm
 PU self-skinning foam W/ plywood, 8pcs T-nuts
 Seat: 10PCS/ 4.1CUFT/ 18KGS/ 19KGS
 Back: 10PCS/ 3.9CUFT/ 18KGS/ 19KGS



◀ **LS-E2/E3**

Recumbent Seat & Back
 Seat: 368x368mm
 Back: 400x311mm
 PU self-skinning foam W/ plywood, 4pcs T-nuts
 Seat: 15PCS/ 3.5CUFT/ 17KGS/ 18KGS
 Back: 20PCS/ 4.5CUFT/ 16KGS/ 17KGS



● **LS-V601**

Recumbent Seat & Back
 Seat: 290x405x64mm
 Back: 425x365x70mm
 PU vacuum foaming W/ plywood, 8pcs T-nuts
 Seat: 13PCS/ 3.5CUFT/ 17KGS/ 18KGS
 Back: 10PCS/ 4.1CUFT/ 19KGS/ 20KGS

● **LS-V602**

Recumbent Seat & Back
 Seat: 280x395x64mm
 Back: 485x385x83mm
 PU vacuum foaming W/ plywood, 8pcs T-nuts
 Seat: 10PCS/ 4.5CUFT/ 13.4KGS/ 14.4KGS
 Back: 8PCS/ 4.5CUFT/ 17KGS/ 18KGS



◀ LS-R01

Agriculture seat - Heavy duty
 490x480x385mm (T=60mm)
 PU self-skinning foam, Steel frame inner w/ weld nuts
 4PCS/ 6.2CUFT/ 20KGS/ 21KGS



◀ LS-R02

Agriculture seat - Light
 400x410x190mm (T=72mm)
 PU self-skinning foam, Steel frame inner w/ weld nuts
 4PCS/ 4.4CUFT/ 13.2KGS/ 14.2KGS



◀ LS-D2

Roller pad
 113x106mm
 PU self-skinning foam
 ID 14.5mm
 50PCS/ 2.7CUFT/ 6.5KGS/ 7.5KGS



◀ LS-D3

Roller pad
 150x116mm
 PU self-skinning foam
 ID 14.5mm
 48PCS/ 3.5CUFT/ 9.6KGS/ 10.6KGS



◀ LS-D5

Roller pad
 200x102mm
 PU self-skinning foam
 ID 25.4mm (1")
 50PCS/ 4.2CUFT/ 14.5KGS/ 15.5KGS



◀ LS-D8

Roller pad
 178x102mm
 PU self-skinning foam
 ID 25.4mm (1")
 50PCS/ 3.4CUFT/ 8KGS/ 9KGS



Exclusive Range of PU System

	Hard	
硬質發泡	7	RIM (Reaction Injection Molding)
仿木製造	6	Wood Imitation Foam
彈性體	5	Elastomer
保溫材	4	Insulating Foam
自成皮發泡	3	Integral Skin (Self-Skinning) Foam
高回彈泡綿	2	High Resilience (HR) Foam
人造肉	1	Gel
記憶泡綿	0	Memory Foam
	Soft	



Health Comfort Profession

The Specialist Of PU
Polyurethane Products

LIH  SIN®



立欣工業股份有限公司

Lead Since Industry Co.,Ltd.

TEL : 886-4-7810889

FAX : 886-4-7810662

web site : www.leadsince.com.tw

e-mail : lead-since@umail.hinet.net

leading.since@msa.hinet.net

彰化縣鹿港鎮彰濱工業區工業東三路15號

No.15, Industrial E-3 Rd, Changbin Industrial Park,

Lugang Township, Changhua County, 50544, Taiwan

